


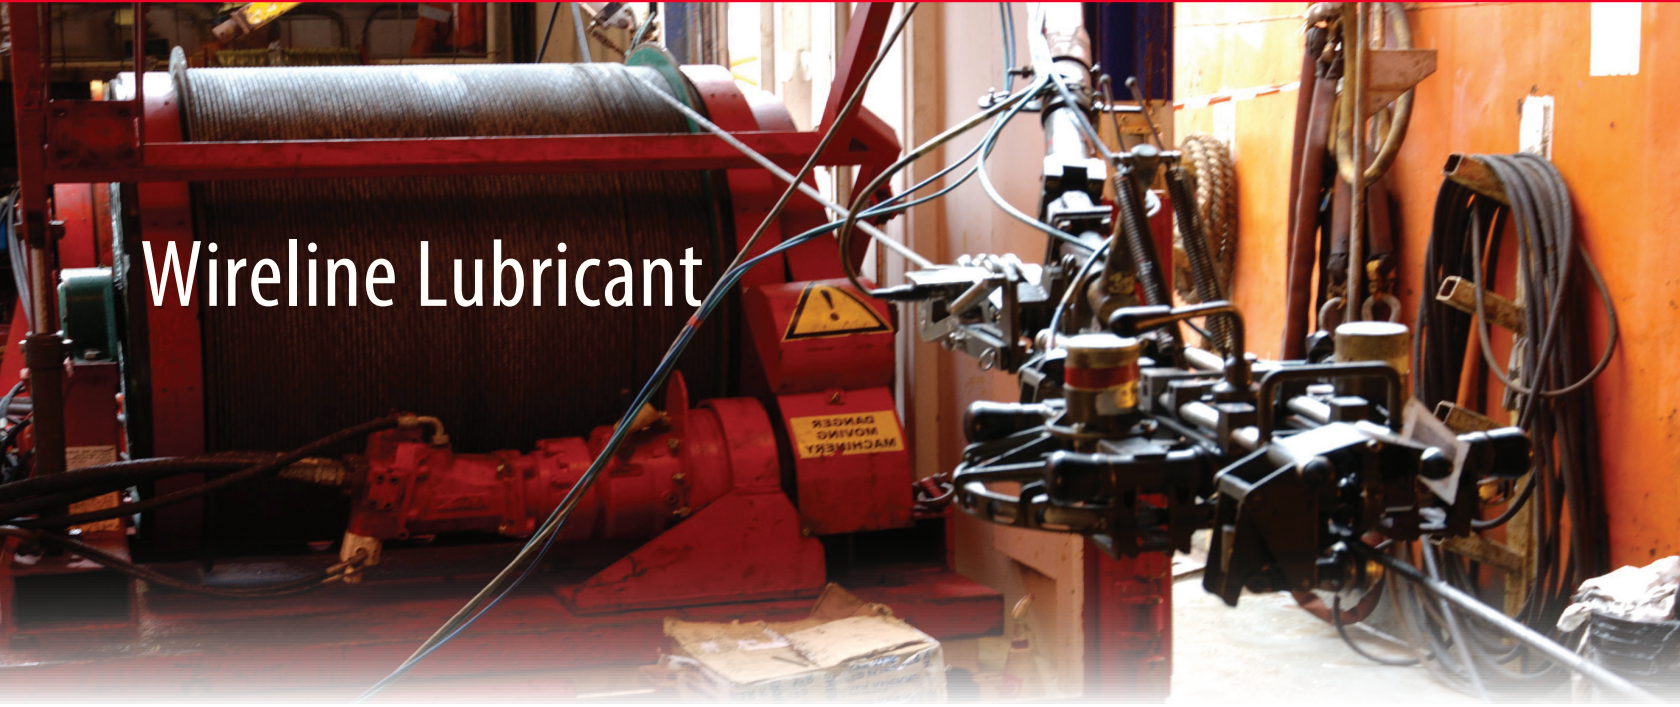

# Wireline Lubricant

## Superior Lubrication Technology

Formulated with the world renowned advanced technology that is 50 times more powerful than typical lubricants, our Wireline lubricant bonds to metal, and dramatically reduces friction.

Ultimately the most superior lubrication technology of its kind able to withstand extreme low and high temperatures. It's resistant against abrasive elements, corrosion/oxidation and helps prevent individual strand breakage.

### ADVANTAGES

- Penetrates and bonds to the wire core
- Heavy load carrying capability
- Extreme high temperature range beyond 500°F
- Extreme low temperature range -40°F
- Non-conductive
- Water resistant/ displaces moisture
- Superior oxidation and corrosion resistance

### BENEFITS OF USE

- Unparalleled protection against seizure
- Exceptional pumpability
- Maximize equipment life
- Reduces power consumption
- Earth friendly
- Non Toxic

| Number | Size                       |
|--------|----------------------------|
| 52035  | 35 lb. pail/15.9 kg pail   |
| 52120  | 120 lb. keg/54.4 kg keg    |
| 52400  | 400 lb. drum/181.4 kg drum |

### PRODUCT SPECIFICATIONS

| Property                                                              | Test Method | Units | WireGlide |
|-----------------------------------------------------------------------|-------------|-------|-----------|
| Penetration@25° (77°F)                                                | ASTM D1403  | mm-1  | 400-430   |
| Worked 60 Strokes                                                     |             |       | 440       |
| Four-Ball Wear Scar<br>(1 Hour 1200RPM 75°C,<br>(167°F) @ 40kg. Load) | ASTM D2266  | mm    | 0.49      |
| Kinematic Viscosity<br>@40°C (104°F)                                  | ASTM D445   | Cst   | 680       |
| Four-Ball Extreme<br>Pressure Weld Point                              | ASTM 2596   | Kg.   | 200       |
| Rust Prevention                                                       | ASTM D1743  |       | Pass      |